

INDUSTRIAL GRADE TOUCH DISPLAYS

Reliable compliance design with multiple touch options for 21.5", 24" and 27"





[WHITE]

[BLACK]



[INDUSTRIAL- 21.5" FHD]

Model Name		RGD2162A-P	RGP2162A-P
ID Type		True Flat(P-Cap)	
Panel Spec	Type Resolution Screen Size (inch) Display Area (mm) Pixel Pitch (mm) Viewing Angle (degree) Response Time (ms) Brightness (cd/m ²) Contrast Ratio Color Depth (bits)	MVA 1920(H)x1080(V) 21.5 476.06(H)x267.79(V) 0.248(H)x0.248(V) 178(H)/178(V) 18 (On/Off) 250 (Typ.) 3000:1 (Typ.) 6 +FRC	
I/O Interface	DVI DP VGA HDMI Audio	N/A DP1.2x1 D-Sub15x1 HDMI1.4x1 3.5mm	DVI-Dx1 DP1.2x1 D-Sub15x1 N/A 3.5mm
Touch	Type Touch Point Screen Printing Glass Coating Interface	P-Cap 10 Black Clear Combo(USB/RS232)	
Features	Color Temperature Gamma Selection Gamma LUT (bits) OSD Languages Speaker Scaling Mode	Neutral/Warm/Cool/User Neutral/2.2 10 English/Spanish/French/German/Italian/Japanese 2W Speaker Full/5:4/4:3/16:9/1:1	
Power Requirements	Power Supply Power Consumption (W)	DC 12V 40(Max)	
Physical Characteristics	Dimensions (WxHxD) (mm) VESA Mounting (mm) Weight (Kg) ID Color IP Rating (Front) IP Rating (Back Cover) Tilt Range (degree) Pivot Range (degree) Swivel Range (degree) Height Adjustment (mm)	537x387x175(with Stand) 537x339x69 (w/o Stand) 100x100 8.2 (with Stand) 6.5 (w/o Stand) White/ Black IP65 IPx1 0~+30 N/A N/A N/A	
Reliability	Operating Temperature(°C) Operating Humidity (RH) Storage Temperature (°C) Storage Humidity (RH)	10 to 40 30% to 75% -20 to 60 10% to 90%	
Certifications and Compliances		UL/cUL(60950),CB(60950),CE,FCC-B	

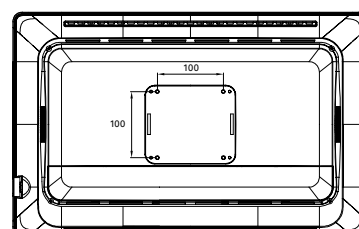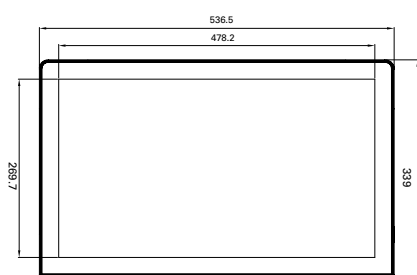



[INDUSTRIAL- 24" FHD]

Model Name		RGD2462A-P	RGP2462A-P
ID Type		True Flat(P-Cap)	
Panel Spec	Type Resolution Screen Size (inch) Display Area (mm) Pixel Pitch (mm) Viewing Angle (degree) Response Time (ms) Brightness (cd/m ²) Contrast Ratio Color Depth (bits)	TN 1920(H)x1080(V) 24 531.36(H)x298.89(V) 0.276(H)x0.276(V) 170(H)/160(V) 5 (on/off) 250 (Typ.) 1000:1 (Typ.) 8	
I/O Interface	DVI DP VGA HDMI Audio	N/A DP1.2x1 D-Sub15x1 HDMI1.4x1 3.5mm	DVI-Dx1 DP1.2x1 D-Sub15x1 N/A 3.5mm
Touch	Type Touch Point Screen Printing Glass Coating Interface	P-Cap 10 Black Clear Combo(USB/RS232)	
Features	Color Temperature Gamma Selection Gamma LUT (bits) OSD Languages Speaker Scaling Mode	Neutral/Warm/Cool/User Neutral/2.2 10 English/Spanish/French/German/Italian/Japanese 2W Speaker Full/5:4/4:3/16:9/1:1	
Power Requirements	Power Supply Power Consumption (W)	DC 12V 40(Max)	
Physical Characteristics	Dimensions (WxHxD) (mm) VESA Mounting (mm) Weight (Kg) ID Color IP Rating (Front) IP Rating (Back Cover) Tilt Range (degree) Pivot Range (degree) Swivel Range (degree) Height Adjustment (mm)	581x400x175(with Stand) 581x360x69(w/o Stand) 100x100 9.5 (with Stand) 7.7 (w/o Stand) White/ Black IP65 IPx1 0~+30 N/A N/A N/A	
Reliability	Operating Temperature(°C) Operating Humidity (RH) Storage Temperature (°C) Storage Humidity (RH)	10 to 40 30% to 75% -20 to 60 10% to 90%	
Certifications and Compliances		UL/cUL(60950),CB(60950),CE,FCC-B	

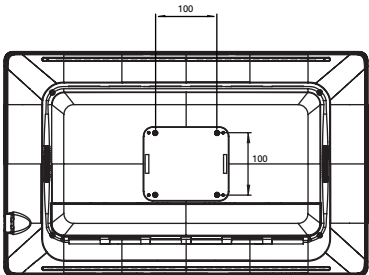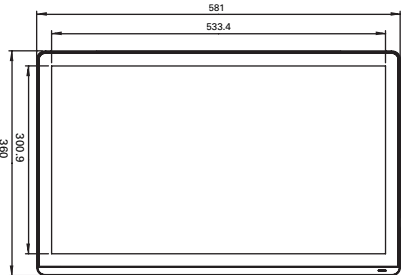


[INDUSTRIAL- 27" FHD]

Model Name		RGD2762A-P	RGP2762A-P
ID Type		True Flat(P-Cap)	
Panel Spec	Type Resolution Screen Size (inch) Display Area (mm) Pixel Pitch (mm) Viewing Angle (degree) Response Time (ms) Brightness (cd/m ²) Contrast Ratio Color Depth (bits)	VA 1920(H)x1080(V) 27 597.6(H)x336.1(V) 0.311(H)x0.311(V) 178(H)/178(V) 12 (On/Off) 300 (Typ.) 3000:1 (Typ.) 8	
I/O Interface	DVI DP VGA HDMI Audio	N/A DP1.2x1 D-Sub15x1 HDMI1.4x1 3.5mm	DVI-Dx1 DP1.2x1 D-Sub15x1 N/A 3.5mm
Touch	Type Touch Point Screen Printing Glass Coating Interface	P-Cap 10 Black Clear Combo(USB/RS232)	
Features	Color Temperature Gamma Selection Gamma LUT (bits) OSD Languages Speaker Scaling Mode	Neutral/Warm/Cool/User Neutral/2.2 10 English/Spanish/French/German/Italian/Japanese 2W Speaker Full/5:4/4:3/16:9/1:1	
Power Requirements	Power Supply Power Consumption (W)	DC 12V 40(Max)	
Physical Characteristics	Dimensions (WxHxD) (mm) VESA Mounting (mm) Weight (Kg) ID Color IP Rating (Front) IP Rating (Back Cover) Tilt Range (degree) Pivot Range (degree) Swivel Range (degree) Height Adjustment (mm)	651x441x175(with Stand) 651x402x69(w/o Stand) 100x100 10.3 (with Stand) 8.4 (w/o Stand) White/Black IP65 IPx1 0~+30 N/A N/A N/A	
Reliability	Operating Temperature(°C) Operating Humidity (RH) Storage Temperature (°C) Storage Humidity (RH)	10 to 40 30% to 75% -20 to 60 10% to 90%	
Certifications and Compliances		UL/cUL(60950),CB(60950),CE,FCC-B	

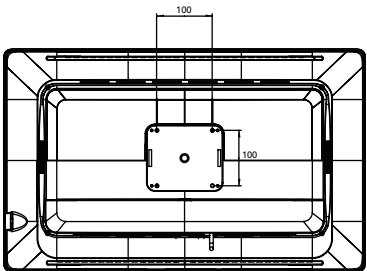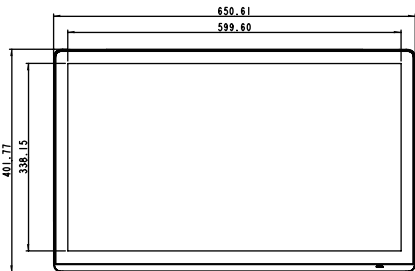

Products

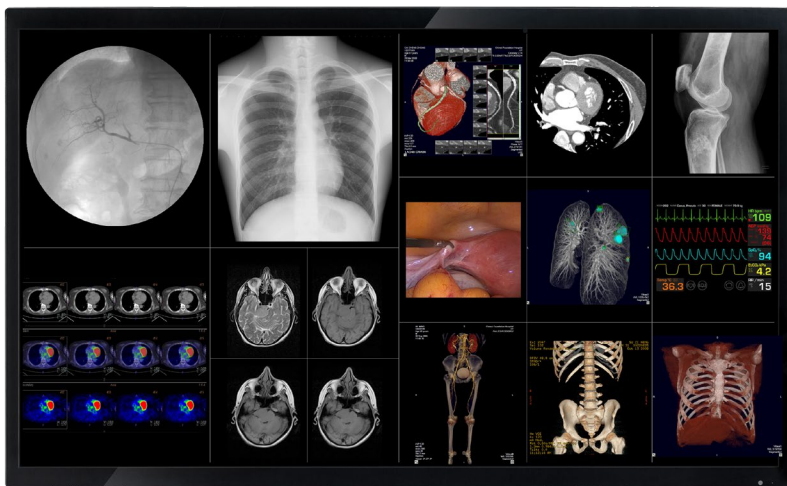

Endo/ Surgical Displays



Industrial/HMI Touch Solutions



Radiology Displays



DIVA

DIVA Laboratories – Headquarter

E-Mail: sales@diva.com.tw

Phone: +886 2 2226 8631

Address: 9F., No.351, Sec. 2, Zhongshan Road,
Zhonghe District, New Taipei City 235, Taiwan