


Analog to Digital Converter Box

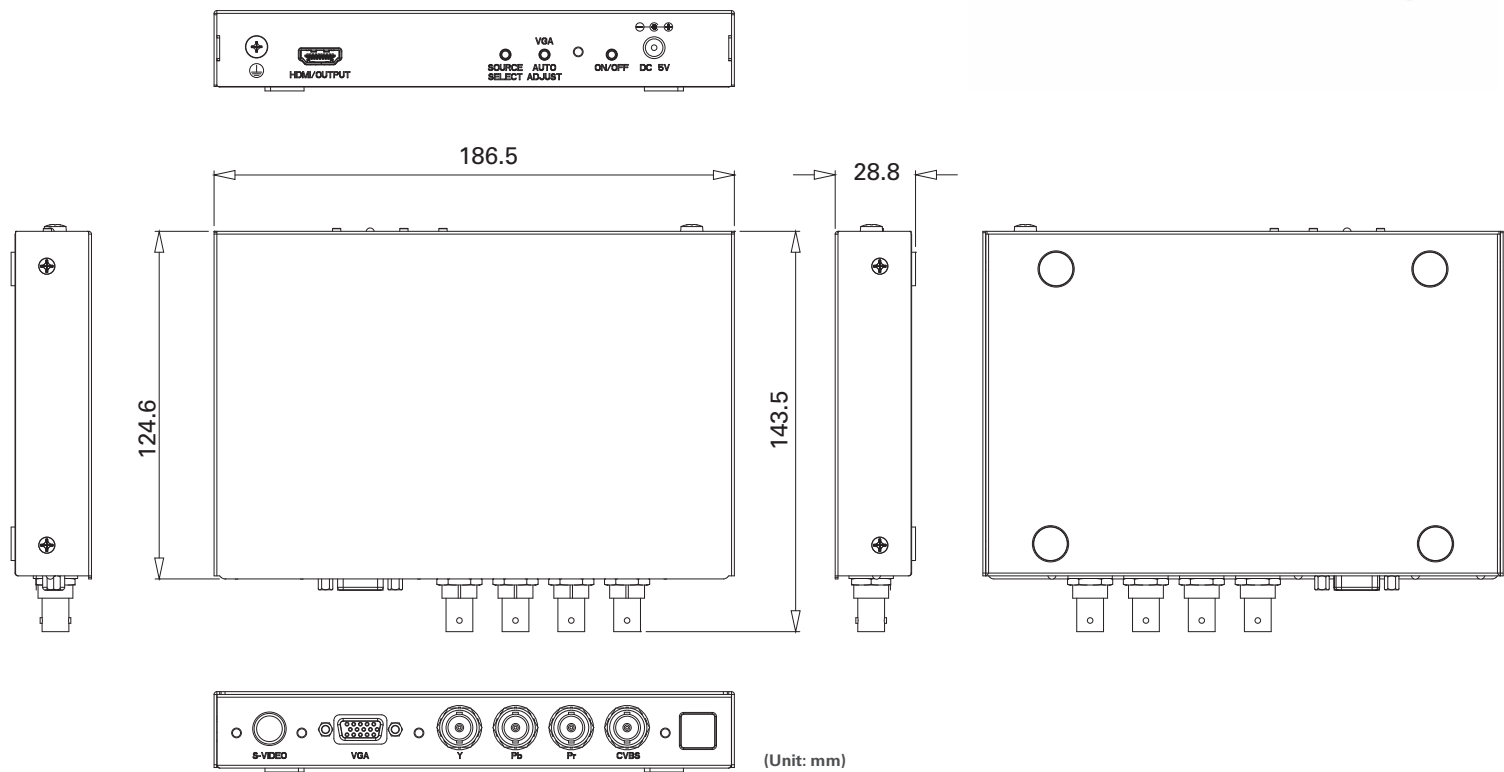

Input Interface	D-sub 15x1 YPbPr x1 CVBS x1 S-Video x1 *Support Separate, Composite, SoG
Output Interface	HDMI 1.4 x1
IR Remote Control	Yes
OSD Control	Yes
Supported Timing	NTSC, PAL, 480p, 576p, 1080i, 1080p
Power Supply	DC 5V
Power Consumption (W)	5.5(Max)
Operating Temperature (°C)	0 to 40
Operating Humidity (RH)	30% to 75%
Storage Temperature (°C)	-20 to 60
Storage Humidity (RH)	10% to 90%
ESD Level	Medical 8kv/15kv class A with ground
Certifications and Compliances	CE(EN 55032;EN 55024;EN 62368-1), FCC Part 15, ROHS, WEEE

Medical ESD level
Image scaling options 5:4 4:3 16:9

Supported Video Input Format

- VGA
 - 720x 400@70Hz
 - 640 x 480@60/73/75Hz
 - 800 x 600@35/38/46/48Hz
 - 1024 x 768@48/56/60Hz
 - 1280 x 1024@64/80Hz
 - 1600 x 1200@75Hz
 - 1920x1080@67Hz
- YPbPr
 - NTSC@60Hz
 - PAL@50Hz
 - 720 x 480p@60Hz
 - 720 x 576p@60Hz
 - 1280 x 720p@60Hz
 - 1920x 1080i@60Hz
 - 1920x 1080p@60Hz
- CVBS
 - NTSC@60Hz
 - PAL@50Hz
- S-Video
 - NTSC@60Hz
 - PAL@50Hz

Supported Video Output Format

- HDMI
 - 1920x1080@60Hz