


Analog to Digital Converter

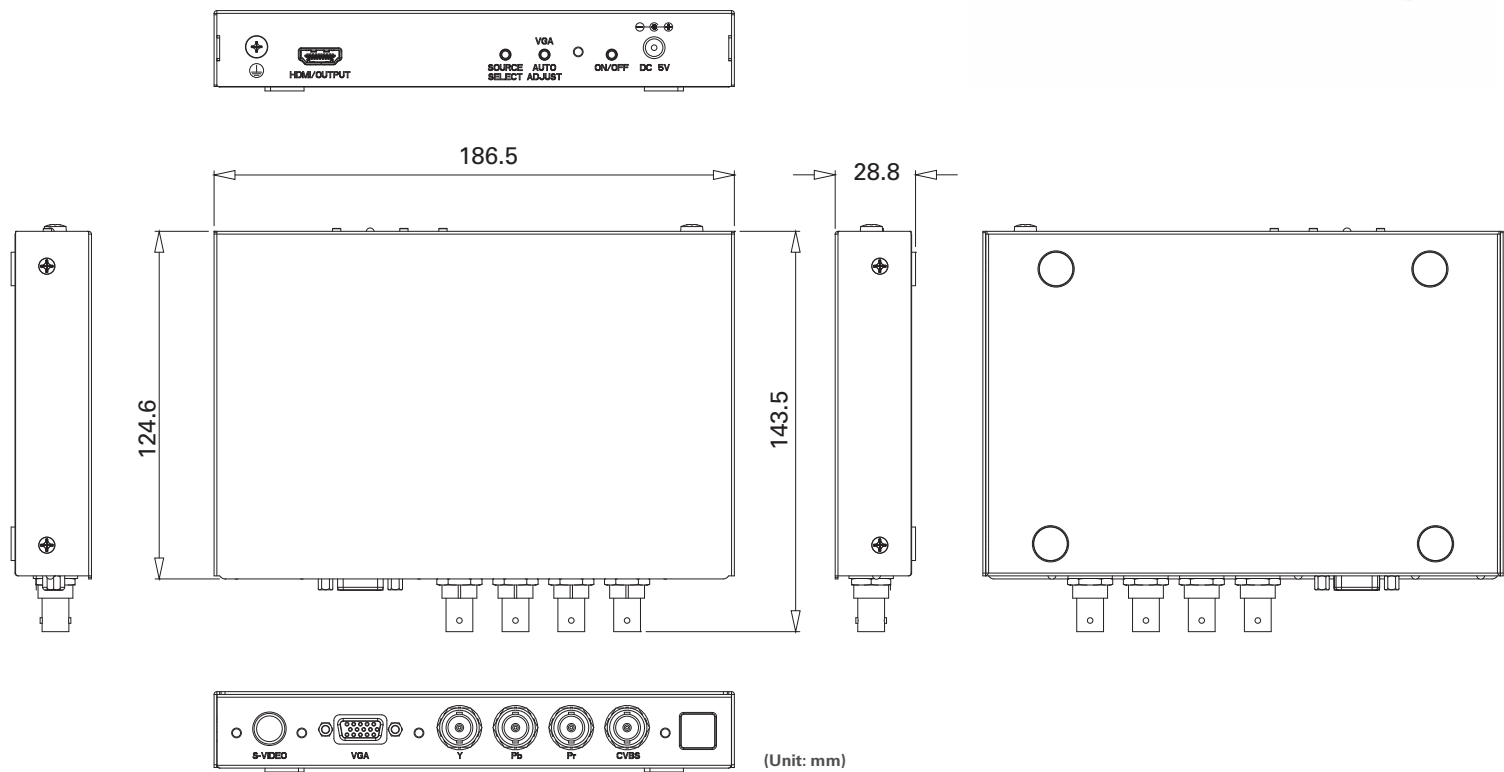

- Medical ESD level
- Image scaling options 5:4 4:3 16:9
- IR Remote Control, OSD Control

Supported Video Input Format

- VGA
 - 720x 400p@70Hz
 - 640 x 480p@75/72/60 Hz
 - 800 x 600p@75/72/69/55Hz
 - 1024 x 768p@75/70/60Hz
 - 1280 x 1024p@75/60Hz
 - 1600 x 1200p@60Hz
 - 1920x1080p@60Hz
- YPbPr
 - NTSC@60Hz
 - PAL@50Hz
 - 720 x 480p@60Hz
 - 720 x 576p@60Hz
 - 1280 x 720p@60Hz
 - 1920x 1080i@60Hz
 - 1920x 1080p@60Hz
- CVBS
 - NTSC@60Hz
 - PAL@50Hz
- S-Video
 - NTSC@60Hz
 - PAL@50Hz

Supported Video Output Format

- HDMI -1920x1080@60Hz

Input Interface	D-sub 15x1, YPbPr x1, CVBS x1, S-Video x1 *Support Separate, Composite, SoG		
Output Interface	HDMI 1.4 x1		
IR Remote Control	Yes		
OSD Control	Yes		
Power Supply	DC 5V		
Power Consumption (W)	5.5(Max)		
Operating Temperature (°C)	0 to 40	Operating Humidity (RH)	30% to 75%
Storage Temperature (°C)	-20 to 60	Storage Humidity (RH)	10% to 90%
Dimensions (WxHxD) (mm)	175x15.7x120		
Weight (Kg)	0.18		
ESD Level	Medical 8kv/15kv class A with ground		
Certifications and Compliances	CE(EN 55032;EN 55035;EN 62368-1), FCC Part 15, ROHS, WEEE		